

Our Products

产品展示

我们主要生产5种沙发植绒布以及包装布，广泛用于室内装饰，家居，珠宝首饰盒，靠垫，沙发以及其他工业用布。具有手感软，色泽艳，弹性佳和防水，防油，防污等特点。

We mainly produce 5 series of sofa flocking fabrics and packaging fabric, which are extensively used in indoor decorations, furniture, jewelry boxes, back cushions, sofa and other industries, with such features as soft touch, bright color, flexibility, water-proof function, oil-resistance and others.

粗帆布类
Canvas series

纺皮类
Leather flock series


毛面绒类
Flat flock series

喷花类
Spray flock series

绒上绒
Flock on flock series

包装布类/珠粒绒
Packaging fabrics

六大产品
类别

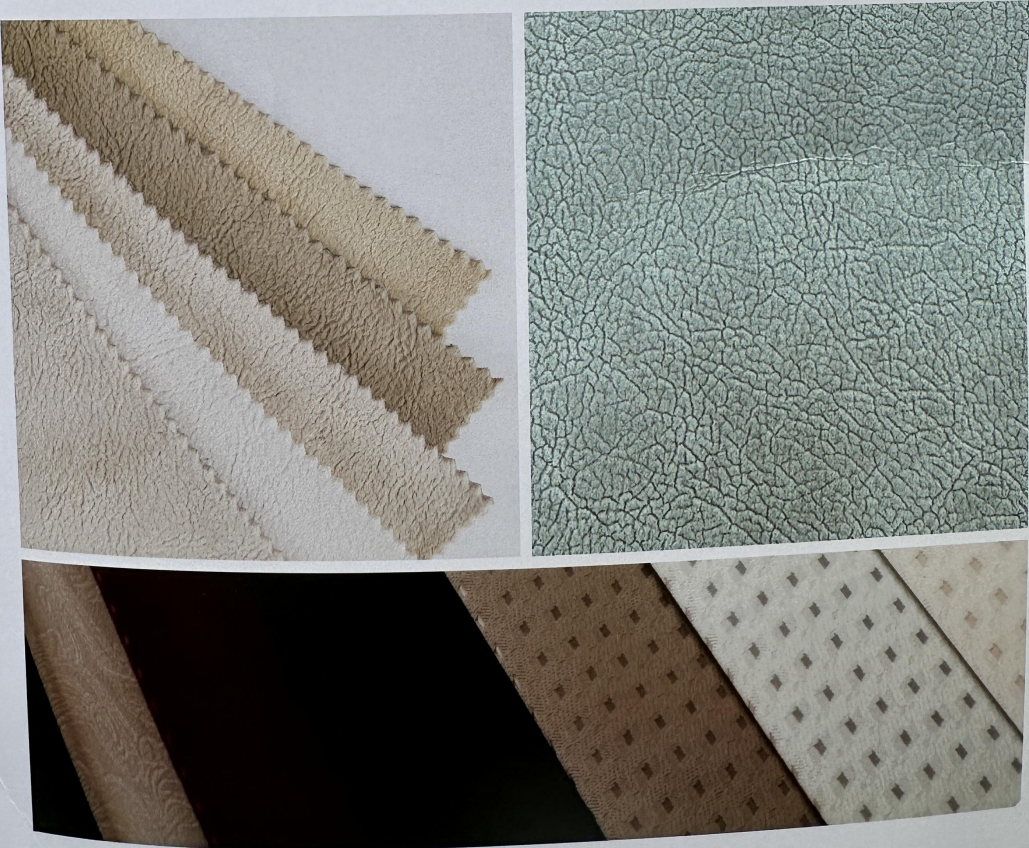

民晟技术性能指标

Fabric™ technical performance index

成分 Element	绒面 Suede	底布 Base cloth		接着剂 Adhesion agent
	尼龙32% Nylon 32%	涤纶12% Dacron 12%	棉7% Cotton 7%	亚克力49% Knitted fabric 49%
测试项目 Test item	技术参数 Technical parameters	单位 Units	执行标准 Executive standard	
克重 Gram weight	480±10	gr/m²	ISO-2286-2	
门幅 Width	140	cm		
断裂强力纵向 Breaking strength lengthways	≥350	N	ISO-13394-1	
撕裂强力 Tear strength	≥25	N	ISO-13937-3	
马丁代尔 Martindale	≥100000	rub	ISO-12947-4	
摩擦色牢度 Rubbing color fastness	DRY≥4 ; WET≥3-4	gs	ISO-105-X12	
皂洗色牢度 Washing color fastness	≥4	bw	ISO-105-C10	
耐光色牢度 Light color fastness	≥4	bw	ISO-105-B02	
拒水性 Water repellency	≥4		ISO-4920-1981	
抗油性 Oil repellency	≥7		ISO-14419-2010	
防污性 Dirt repellency	≥4		AATCC130-2000	

Our Products

产品展示

我们主要生产5种沙发植绒布以及包装布，广泛用于室内装饰，家居，珠宝首饰盒，靠垫，沙发以及其他工业用布。具有手感软，色泽艳，弹性佳和防水，防油，防污等特点。

We mainly produce 5 series of sofa flocking fabrics and packaging fabric;which are extensively used in indoor decorations, furniture, jewelry boxes, back cushions, sofa and other industries, with such features as soft touch, bright color, flexibility, water-proof function, oil-resistance and others.

六大产品类别

粗帆布类
Canvas series

纺皮类
Leather flock series

毛面绒类
Flat flock series

喷花类
Spray flock series

绒上绒
Flock on flock series

包装布类/珠粒绒
Packaging fabrics

Product characteristics

产品特性

防液体 Repellency to liquid

产品所拥有的拒水性功能，让不小心撒在沙发上的液体不会立刻渗到底层，方便您做及时处理和清洁，也让生活上突发状况不会破坏您一天愉快的心情。

可水洗 Machine washable

植绒布的强大抗污功能让清洗成为一件轻松简单的事，在大部分状况下，只要使用一些肥皂盒清水就可以去除脏污，让布回复原先的状况。

绿色环保 Environment friendly

植绒布通过欧美严格的环保标准，不含刺激化学物质，不伤害皮肤和呼吸道。

适于生活 Soft&stylish

欧美时尚品味，超温柔触感，非凡的设计师品味，无与伦比温柔触感，了解您对家庭的重视及追求舒适生活的渴望，将“美”及“温柔”设计在产品中，满足您那细腻品味家庭生活的心。

耐磨损 Extreme durability

沙发布采用高强度耐磨材质和特殊制造技术，通过各项世界级耐磨测试，可轻易应付人或宠物在沙发上面的摩擦(防刮)所产生的“脱毛”“掉色”及“起毛球”的问题。

防污/易去污 Stain Resistant

创新制造技术将抗污保护层植入产品内，再加上使用特殊抗污材质，让布本身拥有强大的抗污力。

Fabric™ Technical Performance Index

民晟技术性能指标

成分 Element	绒面 Suede	底布 Base cloth		接着剂 Adhesion agent
	尼龙32% Nylon 32%	涤纶12% Dacron 12%	棉7% Cotton 7%	亚克力49% Acrylic 49%
测试项目 Test item	技术参数 Technical parameters	单位 Units	执行标准 Executive standard	
克重 Gram weight	420±10	gr/m²	ISO-2286-2	
门幅 Width	140	cm		
断裂强力纵向 Breaking strength lengthways	≥350	N	ISO-13394-1	
撕裂强力 Tear strength	≥25	N	ISO-13937-3	
马丁代尔 Martindale	≥100000	rub	ISO-12947-4	
摩擦色牢度 Rubbing color fastness	DRY≥4 ; WET≥3-4	gs	ISO-105-X12	
皂洗色牢度 Washing color fastness	≥4	bw	ISO-105-C10	
耐光色牢度 Light color fastness	≥4	bw	ISO-105-B02	
拒水性 Water repellency	≥4		ISO-4920-1981	
抗油性 Oil repellency	≥7		ISO-14419-2010	
防污性 Dirt repellency	≥4		AATCC130-2000	

WHP WCMP 产品性能如下:

检测项目	检测标准	单项结论
耐水色牢度	ISO105-E01:2013	≥4-5
耐摩擦色牢度	ISO105-X12:2001	dry≥4-5 wet≥4-5
耐光照色牢度	ISO 105-B02:2014	>5
防污性	AATCC 130-2010	4-5
拒油性#	ISO 14419-2010	3
耐磨性能	ISO 12947-2:1998	4-5
断裂强力	ISO 13934-1:2013	>350
撕破强力	ISO 13937-3:2000	>20
抗起毛起球性	ISO 12945-2:2000	>4
拒水性	ISO 4920:2012	2-3
接缝滑移	ISO 13936-2:2004	<5
甲醛含量	ISO 14184-1:2011	<50
pH 值	ISO 3071:2005	>4
禁用偶氮染料	EN14362-1:2012 (E) & EN14362-3:2012 (E)	<30mg/kg
五氯苯酚 (PCP)	ISO 17070:2006	N. D.
富马酸二甲酯 (DMF)	US EPA 3550C:2007 & US EPA8270D:2007	N. D.
高关注物质 (SVHC)	US EPA3052:1996, US EPA 3050B:1996 US EPA3060A:1996. US EPA 3550C-2007 US EPA3540C:1996, ISO 17353:2004 (E) BS EN 14582:2007	N. D.
燃烧测试	BS 5852-1:1979, 香烟点火测试	合格
燃烧测试	BS 5852-1:1979, 丁烷焰气体点火测试	合格
Σ壬基酚 (NP), 辛基酚 (OP), 壬基酚聚氧乙烯醚 (NPEO) 和辛基酚聚氧乙烯醚 (OPEO)	参考 US EPA 3550C:2007 & US EPA 8321B:2007	<50

WHP WCMP Summary Of Test Results:		
Test Item	Test Request	Conclusion
Color Fastness to Water	ISO105-E01:2013	≥4-5
Color Fastness to Rubbing	ISO105-X12:2001	dry≥4-5 wet≥4-5
Color Fastness to Light	ISO 105-B02:2014	>5
Soil Release Oily Stain Release	AATCC 130-2010	4-5
Oil Repellency#	ISO 14419-2010	3
Abrasion Resistance	ISO 12947-2:1998	4-5
Tensile Strength	ISO 13934-1:2013	>350
Tearing Strength	ISO 13937-3:2000	>20
Pilling Resistance	ISO 12945-2:2000	>4
Spray Test	ISO 4920:2012	2-3
Seam Slippage	ISO 13936-2:2004	<5
Formaldehyde Content	ISO 14184-1:2011	<50
pH Value	ISO 3071:2005	>4
Azo Colorants	EN14362-1:2012 (E) & EN14362-3:2012 (E)	<30mg/kg
Pentachlorophenol (PCP)	ISO 17070:2006	N. D.
Dimethylfumarate (DMF)	US EPA 3550C:2007 & US EPA8270D:2007	N. D.
Very high concern (SVHC)	US EPA3052:1996, US EPA 3050B:1996, US EPA3060A:1996. US EPA 3550C-2007, US EPA3540C:1996, ISO 17353:2004 (E) BS EN 14582:2007	N. D.
Flammability Test	BS 5852: part 1:1979, Cigarette Test	pass
Flammability Test	BS 5852: part 1: 1979, Match Test	pass
Σ of Nonylphenol (NP), Octylphenol (OP), Nonylphenol Ethoxylate (NPEO) and Octylphenol Ethoxylate (OPEO)	Refer to US EPA 3550C:2007 & US EPA 8321B:2007	<50